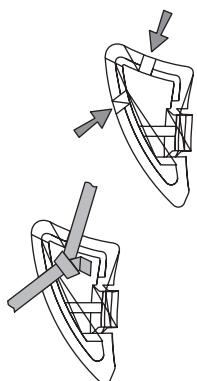
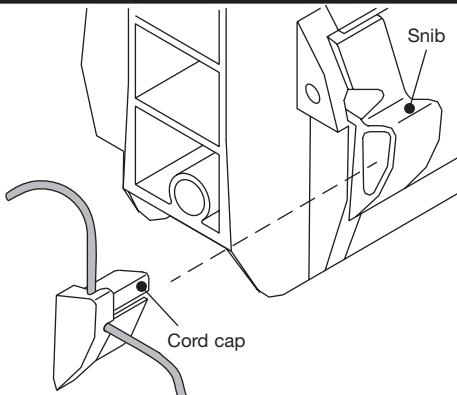


Can Be Fitted Either End Of Ventilator, Left Hand Illustrated


Cord Control Pack (TA18002): Contents: Cord cap (left hand) x 1, Cord cap (right hand) x 1, White Acorn x 1, Black Acorn x 1 and Cord 3m

Stage 1


Tie a knot halfway along cord. Select correct cord cap for right or left handed operation. Push cord into two slots, with knot inside.

Stage 2

Press cord cap into recess in snib.

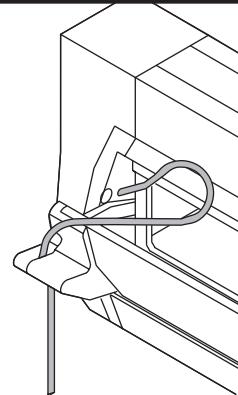Stage 3

Open flap, pass upper part of cord through hole in endcap (from inside to outside).

Stage 4

Check operation. When fitting acorns, ensure all vents have same colour for opening the vent. Excess cord must be cut and positioned greater than 1500mm from the finished floor level (see over for details) and fit spare cord cap to opposite snib.

To our knowledge there is no recognised safety standard applicable to the remote control of Domestic Background Ventilators, our guidance is based on the instructions shown in '**BS EN 13120:2009+A1:2014 – Internal blinds – Performance requirements including safety**'.

Where Part M, or any Part of the Building Regulations for England or devolved assembly applies. If they are different to these instructions, or any other local regulations or standards exist, please seek specialist advice.

Warning

Young children can be strangled by loops in pull cords, chains tapes and inner cords that operate the product. To avoid strangulation and entanglement, keep cords out of the reach of young children. Cords may become wrapped around a child's neck. Move beds, cots and furniture away from windows covering cords. Do not tie cords together. Make sure cords do not twist and create a loop.

All warning labels should be left on the product and clearly visible to the end user after install.

