

Maco Multi Matic Invisible

Concealed tilt and turn hinge system

Suitable for:

PVCu  TIMBER 

Tilt and turn window gear (tilt before turn) for windows up to 1400mm wide, 2250mm high and sash weights up to 150kg.

Maco Multi Matic Invisible is open in only, has a tilt mode position for ventilation and a turn mode for cleaning. An enhanced security version is available to comply with PAS 24.



Tilt position for ventilation



Closed position

Features and Benefits

- Anti-slam device
- Three dimensional hinge adjustment
- Adjustable sash lifter prevents sash drop
- Enhanced security version available
- Fits smaller mullion profiles



Turn position for cleaning

Details

Window Hardware

Size capacity

Sash widths 385 – 1400mm (Maco Multi Power-370-1400mm)
Sash heights 470 – 2250mm (Maco Multi Power-370-1400mm)
For sizes close to these limits, phone for details

Weight capacity

Maximum sash weight – 100kg (Maco Multi Power – 150kg)

Manufactured from

Mild steel

Standards

BS EN 1670 Class 5BS EN 13126-8
BS EN 13126-5

Finish


Silver Chromate
Tricoat (high corrosion resistance) also available

Recommended screws

4mm/No.8 countersunk head
Handle fitting - M5 machine screw or suitable alternative
For Tricoat finish, ensure Tricoat screws are used

More information

enquiries@titon.co.uk / 01206 713801

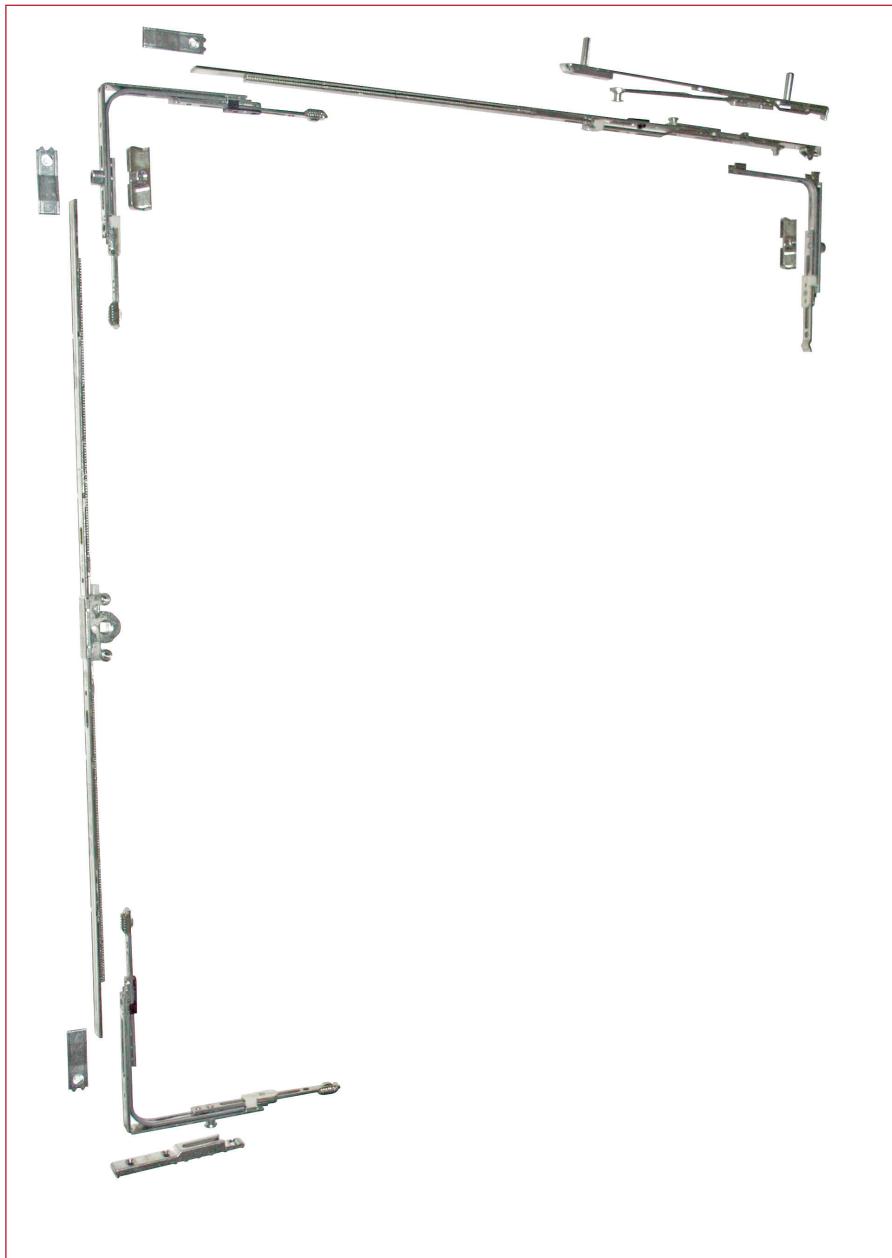

Configuration above is for timber windows only

*Maco Multi Matic Power standard for PVCu and optional for timber



Bottom corner - Timber



Bottom corner - PVCu



Maco Multi Power*