

HRV1.65 Q Plus

Ultra energy efficient Heat Recovery Ventilation unit

For use in medium to large sized dwellings

The enhanced capacity HRV1.65 Q Plus continuously running whole-house ventilation unit with heat recovery is independently tested by the BRE maintains an ultra compact size despite its improved results.

Combining extremely low power consumption and a highly efficient heat exchanger, the HRV2.85 Q Plus is specifically designed to enhance SAP performance via Appendix Q, yet still small enough to be easily incorporated into medium or large sized dwellings.

Recognised and listed in the UK Product Characteristics Database and includes intelligent humidity options through controller options.

MVHR



Features & Benefits

- Highly versatile compact unit
- Extremely low Specific Fan Power; down to 0.43 W/l/s
- Highly efficient heat exchanger; up to 89%
- Airflow up to 96l/s (344 m³/h) at 100 Pa
- Accepts 125mm ducting no adaptors required
- Intelligent frost protection, stepped reduction of supply air rates prevents HRV unit from freezing
- ISO Coarse 55% (G3) filters as standard with ISO Coarse 60% (G4) as an option
- Fully adjustable boost overrun timer 0-60 minutes; can be used with non-latching (momentary) switches to prevent unit from being accidentally left in boost mode
- Volt free switching control
- Intelligent controller, quick and easy to commission
- Lightweight for easy handling
- Quick fix mounting bracket
- IP32 rating
- On board aura-t™ option
- Patented
- Independent fan adjustment
- Effective in reducing pollutants in the home and improving Indoor Air Quality (IAQ), therefore reducing the risk of Toxic Home Syndrome
- Intelligent Summer Bypass & humidity controls
- SUMMERboost® facility
- Available in left and right handed configurations

Eco HMB Models:

- Compatible with auralite® HRV (TP518) status indicator and aura-t™ controller
- Fitted with removable filter covers on the front panel
- Standard - Volt free switching control
- Optional - Switch live control available with via Relay (TP505)

Eco B Models:

- Compatible with Eco-aura range; aurastat®, auramode® and aura-t™ controllers and auralite® HRV (TP519) status indicator
- Duct Pre-heater control (requires independent power supply)
- BMS compatible via RS485 (subject to limitations, additional software requirements and specification with any order)
- Standard - Volt Free switching and switch live control

Product Codes

HRV1.65 Q Plus HMB Eco auralite® & aura-t™ ready - **TP410HMB/544** (left hand config) or **TP410HMB/RH** (right hand config) - Energy Rating A

HRV1.65 Q Plus B Eco-aura controls ready - **TP420B/LH** (left hand config) or **TP420B/RH** (right hand config) - Energy Rating A

Filters:

XP2010671/099 - ISO Coarse 55% (G3) filters fitted as standard (UK only).

XP2010897/099 - ISO Coarse 60% (G4) filters fitted on request (Europe fitted as standard).

XP2011096/099 - ISO Coarse 55% (G3)/ISO ePM1 50% (F7) filters available on request.

XP2011097/099 - ISO Coarse 60% (G4)/ISO ePM1 50% (F7) filters available on request.

Standards

Conforms to requirements of UK statutory Building Regulations and Technical Standards for Ventilation and BRE 398.

SAP Appendix Q tested

Exceeds requirements of Building Regulations Approved Document L (England & Wales).

EU RoHS Directive compliant.

Conforms to requirements of EC council directives relating to Electromagnetic Compatibility and Electrical Safety:

2006/95/EC (LVD), 2004/108/EC (EMC)
EN 60335-1:2002/A2:2006, EN 60335-2- 80:2003/A1:2004.

CE and UKCA marked.

Specification

Dimensions: 600mm wide x 505mm high (excluding ports) x 353mm deep (363mm with mounting bracket)

Weight: 22kg

Finish: White Paint

Materials:

Housing: Zintec sheet steel housing, powder coated white

Internals: Expanded polypropylene (EPP)

Heat exchanger: Polystyrene

Internal insulation: Closed cell foamed Nitrile rubber, class 'O' fire rating

Standard filters: Grade ISO Coarse 55% (G3) synthetic filters.

Guarantee period: 3 years (UK only)


Electrical: 230V ~ 50/60Hz, 3A fuse

Installation: To be installed accordance with the relevant and applicable building regulations.

Maintenance: Service and filter clean/replacement subject to local environment - see product manual.

Acoustics: Full acoustic data available online www.titon.com/acoustics.

Drawing & Dimensions

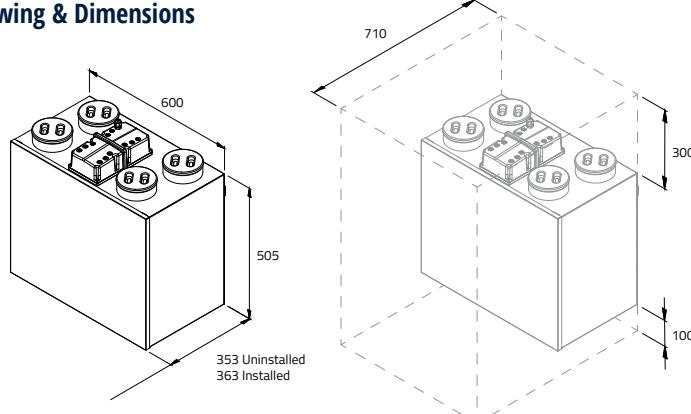

Dimensions in mm

Performance


The figures and compliance levels below relate to current SAP requirements. Revised SAP guidance will have an effect on performance and up-to-date figures can be found on the relevant product page at www.titon.com.

Exhaust terminal configuration*	Fan speed setting	SFP (W/l/s)	Heat exchange efficiency (%)		SFP (W/l/s)	Heat exchange efficiency (%)
			2009	2012		
Kitchen + 1 additional wet room	100% variable	0.44	89	0.46	89	
Kitchen + 2 additional wet rooms	100% variable	0.43	89	0.54	87	
Kitchen + 3 additional wet rooms	100% variable	0.50	87	0.65	86	
Kitchen + 4 additional wet rooms	100% variable	0.59	86	0.84	84	
Kitchen + 5 additional wet rooms	100% variable	0.70	85	1.05	83	
Kitchen + 6 additional wet rooms	100% variable	0.83	84	1.27	82	
Kitchen + 7 additional wet rooms	100% variable	1.00	83	-	-	

Figures taken from the BRE Test Results.

*Number of wet rooms is based on SAP Q test criteria and does not correlate directly with regulatory performance requirements.

Nominal Fan Performance

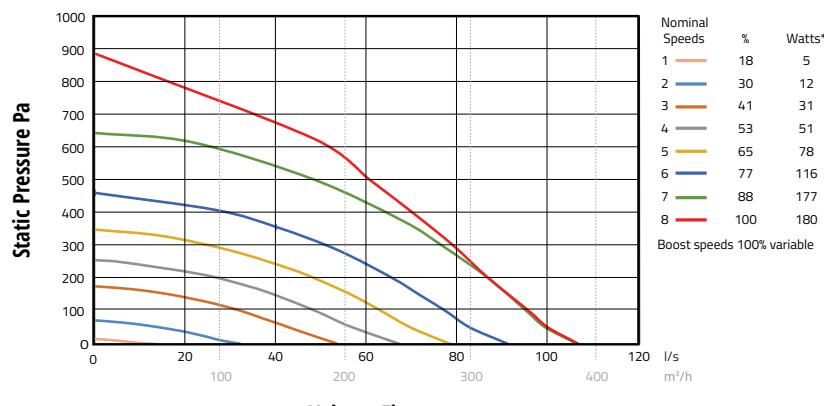

*@FID (0 Pa)
100% variable speed control. Performance curves for Eco version.

Acoustic Data

Product	% of Max flow	Airflow	dB(A) @ 3m Hemispherical			dB(A) @ 3m Spherical	
			Induct Inlet	Induct Outlet	Casing Breakout	Casing Breakout	
HRV1.65 Q Plus	41%	52l/s @ 28Pa	42	49	25	22	
	65%	75l/s @ 52Pa	48	56	34	31	
	100%	99l/s @ 100Pa	54	67	47	44	

For full frequency acoustic data at various speeds please see www.titon.com. All acoustic data is third party tested at Sound Research Laboratories (SRL) Ltd.