

# aura-t™ SMART (B2 WiFi)

## HRV Q Plus Touch Screen Programmer

### For use with Titon HRV Q Plus B2 Model Range

aura-t™ SMART (WiFi) is a simple yet striking touchscreen controller for programming, commissioning and occupancy control for Titon's range of Mechanical Ventilation Heat Recovery (MVHR) units..

The aura-t™ SMART (WiFi) controller allows straightforward operation of ventilation speeds. Offering WiFi connection via Titon's auraSMART® app available via Android or iOS mobile devices.

#### Product Number

aura-t™ SMART (WiFi) – **TP746/EU**

# Controls



#### Description

Titon's aura-t™ HRV is for commissioning and monitoring a Titon TP\*\*\*B2 HRV Q Plus unit.

aura-t™ SMART (WiFi) provides the following functions:

- Compatible with auraSMART® app
- WiFi connection
- Digital 4 speed switch
- 7-day, 4 events per day programmable Speed 1 timer
- Filter change indicator with adjustable change interval
- Internal Humidity threshold adjustment
- Kitchen & Wet room Boost Overrun time adjustment
- ECO Power saving mode
- Fan Commission cloning
- Enhanced fault indication including fans and thermistors
- Running Hours displayed
- Boost Alert if in boost for over 2 hours
- Room Sensor Configuration
- Balanced frost protection
- LH/RH selection on compatible units

aura-t™ SMART (WiFi) is an icon based rather than language specific controller.


### Features & Benefits

- Simple user friendly interface
- WiFi connection
- Compatible with auraSMART® app
- aura-t™ SMART (WiFi) is an icon based rather than language specific controller.
- Compact sleek design
- Real-time fan commissioning for all speeds
- Filter change alert indicator with adjustable change interval
- Internal humidity threshold adjustment
- Kitchen & wet room boost overrun time adjustment
- Switch configuration menu
- Time and day display
- Backlight with automatic dimming
- Real-time indication of HRV status and operating mode
- Optional passcode protected commissioning and setup screens
- Summer bypass configuration menu
- Enhanced fault indication including fans and thermistors
- LH/RH selection on compatible units
- Programmable boost inhibit

#### Specification

Dimensions:	87mm wide x 87mm high x 24mm deep supplied with 3 metre connection cable with moulded 4 way plug.
Weight:	185g
Finish:	High gloss finish
Materials:	ABS
Guarantee period:	1 year
Electrical:	12V DC

#### Drawing and Dimensions

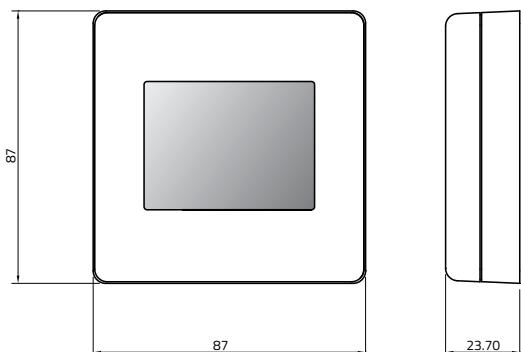

Dimensions in mm